rafeed LED E series

رفيد ليد الفئة أي

Nova Recessed Panel Downlight NV30206

نوفا

This fixture can be used in stores and malls, in addition to villas and luxurious apartments, as it distributes the light in an organized way and gives a nice view.

يستخدم هذا الجهاز في الفنادق، المشافي، المطاعم، المؤسسات الحكومية وصالات العرض، بالإضافة إلى انه يستخدم في المحلات التجارية والأسواق التجارية ويمكن إستخدامه في الفلل والشقق السكنية الفخمة حيث يقوم بتوزيع الإنارة بشكل منتظم ويعطي منظرا جميلا.



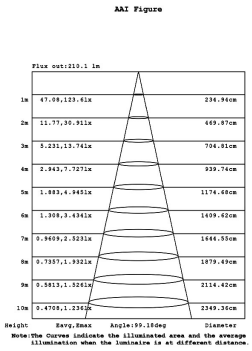

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



2 Years Warranty | IP44 | Front IP44 | Back IP20 | CB | SASO | EEL

Power 4.5 W

Lumen 297 lm

Input Voltage 220-240 V AC product

Frequency 50/60 Hz

PF 0.9

LED type SMD

Color Temperature 3000

Lumen Efficiency 66 lm/W

Beam Angle 120°

CRI 80

Dimming Method not dimmable

Materials

Color

Dimension (D x H) 85 x 21 mm

Cut Out 70 mm

Working temperature -20 C° to +40 C°

Installation way Recessed

Applications Showrooms, Supermarkets, Hotel, Offices, Government institutions, Schools, Hospitals & Clinics, Restaurants

visit product on website

Luminous flux and connected electrical load are subject to an initial tolerance of +/- %10. Tolerance of color temperature +/- 150 K. Unless stated otherwise, the values apply to an ambient temperature of 25° C.
We reserve the right to make technicale changes without prior notice. Visit us www.rafeed.co