rafeed LED E series

رفيد ليد الفئة أي

RASHED Tube Light RA60499-C

راشد

This Device Replaces Traditional Tube, And It Saves 50% Of Electricity Consumption, In Addition to 10X Time Life Span.

يستخدم المصباح الأنبوبي في الفنادق، المشافي، المكاتب، المدارس، السوبر ماركت، المطاعم، المؤسسات الحكومية وصالات العرض، الخ.
يعد مصباح الليد الأنبوبي بديلا مباشرا عن مصابيح النيون الفلوريسنت التقليدية، ويمتاز عنها بتوفير 50% من استهلاك الطاقة وعمر أطول بعشرة أضعاف.

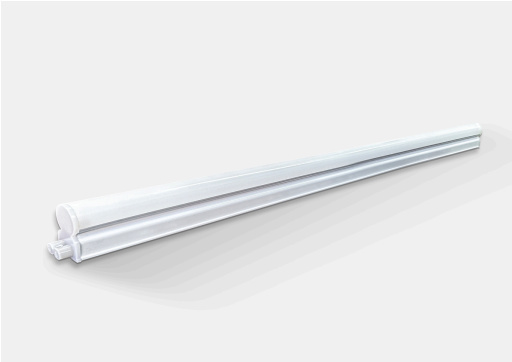

2 Years Warranty | IP20

Power 12 W

Lumen 1200 lm

Input Voltage 220-240 V AC product

Frequency 50/60 Hz

PF 0.5

LED type SMD

Color Temperature 6000

Lumen Efficiency 100 lm/W

Beam Angle 180°

Base Type T5

CRI 80

Dimming Method not dimmable

Materials

Color

Dimension (W x L x H) 24 x 600 x 39 mm

Working temperature -20 C° to +40 C°

Installation way Recessed

Applications Offices, Hospitals & Clinics, Supermarkets, Schools, Showrooms, Government institutions, Restaurants, Hotel

visit product on website

Luminous flux and connected electrical load are subject to an initial tolerance of +/- %10. Tolerance of color temperature +/- 150 K. Unless stated otherwise, the values apply to an ambient temperature of 25° C.
We reserve the right to make technicale changes without prior notice. Visit us www.rafeed.co